



Benjamin Moore®

# ELEMENT GUARD®

Beautiful exterior color that  
stands up to the elements





## Beautiful results with moisture resistance

Every structure's exterior should have a beautiful look and excellent protection, no matter the weather. Benjamin Moore® Element Guard® is a premium exterior paint specially formulated to offer advanced moisture protection that performs in any weather, including wet and humid environments.

## Stands up to the elements

Element Guard's 100% acrylic resin provides protection against wind-driven rain, excessive humidity and other harsh weather conditions.

## Benjamin Moore premium quality

Excellent adhesion, resistance to cracking and peeling, and superior hide and color retention combine to ensure Element Guard will apply all Benjamin Moore exterior colors in premium quality, designed to last and backed by a limited lifetime warranty.




# EARLY RAIN RESISTANCE: Apply at least 60 minutes before rainfall

We painted two coats of Element Guard and a leading national competitor's product side by side onto the same substrate and allowed one hour of dry time before exposing the substrate to one hour of high moisture conditions. See how Element Guard maintains its finish quality, while the competitor's product blisters in the moisture.

Element Guard®



A leading national competitor

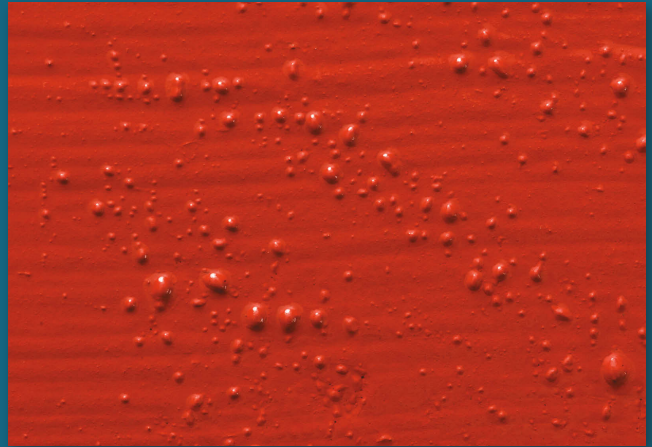

*\*After application over wood, primed surfaces or previously painted surfaces (77°F / 50% RH). Other surfaces such as hardboard or vinyl may require a longer dry time.*

## Paint with confidence: Extend your workday and the painting season

Apply Element Guard...

- ✓ At least 60 minutes\* before rainfall or dew
- ✓ In colder months with temperatures as low as 35°F
- ✓ In warmer months with temperatures as high as 100°F

KEY FEATURES	BENEFITS
Provides a mildew-resistant coating	Create exterior protection that stands up to all types of moisture
100% acrylic resin formula	Provide excellent adhesion and resistance to peeling and cracking
Engineered with Gennex® Color Technology	Contributes to superior hide and color retention across Benjamin Moore colors
Colors for Vinyl palette	Offer a painting option for vinyl siding with 75 Benjamin Moore colors that have been tested and identified to avoid sun-induced warping.*

\*Be sure to inspect and confirm proper installation. Make repairs as needed.  
Before painting, always check specific vinyl manufacturer's guidelines and the Technical Data Sheet.



# Benjamin Moore®

## ELEMENT GUARD®



CODE	GLOSS/SHEEN	VOLUME SOLIDS	COVERAGE <sup>1</sup>	DRY TIME <sup>2</sup>	VOC RANGE
<b>0763</b>	Flat (0.5-2.5 @ 85°)	34.5 ± 2%	300 – 400 sq. ft.	Touch: 1 Hour Recoat: 4 Hours	< 50 g/L
<b>0764</b>	Low Lustre (10 – 15 @ 60°)	34.2 ± 2%			
<b>0765</b>	Soft Gloss (50 – 60 @ 60°)	37.8 ± 2%			

SDSs and TDSs are available at [benjaminmoore.com](http://benjaminmoore.com).

<sup>1</sup>Theoretical gallon coverage at recommended film thickness (sq. ft.) <sup>2</sup>Dry time at 77 °F (25 °C) at 50% RH.



Your Benjamin Moore® representative is here to answer your questions about Element Guard® exterior paint.

Find your rep: 1-866-708-9180 or [benjaminmoore.com](http://benjaminmoore.com).

